



SR60 ROLLER DOOR OPENER



DOOR TYPES: residential rolling garage doors **DOOR SIZE:** doors up to 13.5m²

Key Benefits



Compliant to Australian and New Zealand Standard AS/NZS 60335-2-95



Soft Start / Stop Function

Designed to ensure smooth and quiet door operation.



Courtesy Lighting

Ultra-bright LED lighting illuminates your garage when the opener is activated.



2 Year Warranty

Backed by a 2 year / 5,000 cycle warranty* we stand behind our products with an after sales support team that we believe are the best in the industry.

Standard Safety Features



Premium Automatic Safety Reverse

With its automatic safety function your garage door will stop and reverse automatically if obstructed going down or stop if obstructed going up.



Automatic Force Sensing

Equipped with automatic force sensing, with each operation the garage door opener monitors and adjusts the force needed to open your garage door.



Manual Release

In case of power failure you can simply activate the manual release to open your garage door.

Kit Contents



1 x Powerhead



2 x Three channel
key ring
mini-transmitters



Wireless wall
button CM128




Weight bar

SPECIFICATIONS

- 24V DC motor with thermal overload protection
- Input voltage: 240V AC
- Rated door area up to 13.5m²
- Max door weight up to 60kg
- Max peak pulling force: 500 N
- 433.92 MHz AM radio with Chamberlain Peak Detect™ rolling code technology
- Up to 64 memory registers
- Garage illumination: 10 standard ultrabright LEDs
- Noise rating 1M: 59dB


SR60 ROLLER DOOR OPENER

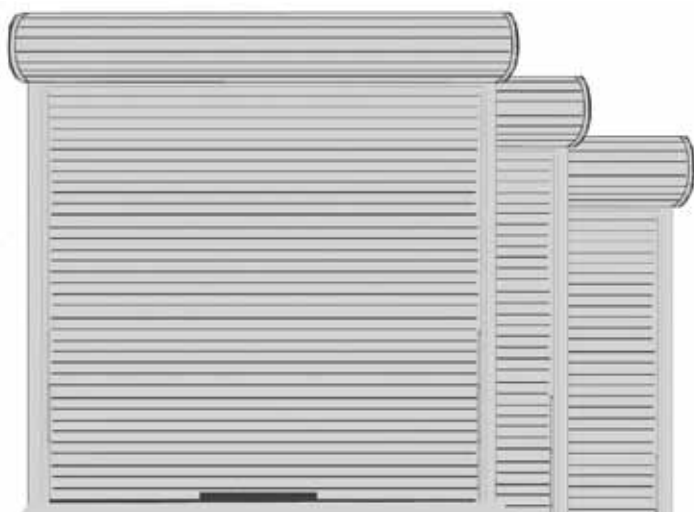


DOOR SPECIFICATIONS

- Maximum lifting under spring tension = 15kg
- Suitable for steel spring balanced doors

DOOR OPENING AND CLOSING TIMES




13 seconds



13 seconds
(based on a 2.3m high door)

Door height: 4.5m, 3.0m, 2.3m Door width: 3.3m, 2.6m, 1.7m
Single dwelling, max door weight: up to 60kg

TYPICAL INSTALLATION

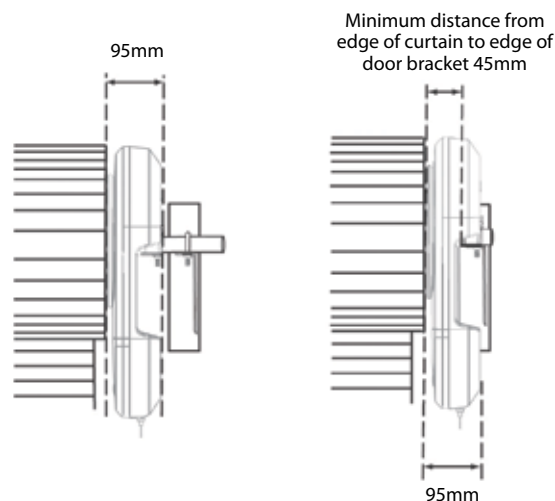

OPTIONAL ACCESSORIES



C940
Wall or visor mounted
single channel
transmitter



774ANZ
Protector system safety
IR beam kit (includes
wire and brackets)



C840
Wireless keypad



Phone: 1800 427 243 Web: steel-line.com.au